



GUNNEBO ALLOY HOOKS

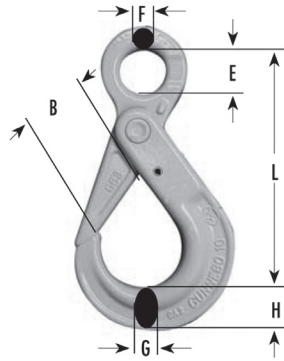

SAFETY HOOKS EYE-TYPE

CODE NO.	CHAIN SIZE IN	GRADE	WORKING LOAD LIMITS (LBS)	DIMENSION (INCHES)						WIEGT EACH (LBS)
				L	B	E	F	G	H	
BK-5-6-8	7/32	80	2,100	4.3	1.1	0.87	0.39	0.55	0.75	0.97
BK-7-8-8	9/32	80	3,500	5.4	1.4	0.99	0.43	0.67	0.91	1.7
BK-10-10	3/8	100	8,800	6.6	1.7	1.3	0.51	0.83	1.2	3.3
BK-13-10	1/2	100	15,000	8.1	2.1	1.7	0.63	1.2	1.5	6.2
BK-16-10	5/8	100	22,600	10	2.4	2.2	0.79	1.5	1.9	12.3
BK-18-20-8	3/4	80	28,300	11.4	2.7	2.4	0.87	1.7	2.2	17.4
BK-22-8	7/8	80	34,200	12.6	3.1	2.8	0.95	1.9	2.4	24.7
BK-26-8	1	80	47,700	13.6	3.9	3.1	1	2	2.7	32
BK-28-8	1 - 1/8	80	55,100	15.8	4.7	3.5	1.1	2.4	3.2	48.5

* Design Factor 4:1 Proof tested and certified. **Grade 100 hooks have recessed trigger

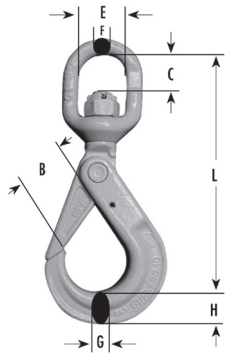

SAFETY HOOKS W/ BALL BEARINGS


(SWIVEL EYE TYPE) Hooks swivel 360° under full load.

CODE NO.	CHAIN SIZE IN	GRADE	WORKING LOAD LIMITS (LBS)	DIMENSION (INCHES)						WIEGT EACH (LBS)	
				L	B	C	E	F	G		H
BKL-5/6-8	7/32	80	2,100	5.9	1.1	0.91	1.3	0.43	0.55	0.75	1.5
BKL-7/8-8	9/32	80	3,500	7.2	1.4	1.1	1.4	0.47	0.67	0.91	2.4
BKL-7/8-8	5/16	80	4,500	7.2	1.4	1.1	1.4	0.47	0.67	0.91	2.4
BKL-10-10	3/8	100	8,800	8.6	1.7	1.4	1.7	0.59	0.83	1.2	4.4
BKL-13-10	1/2	100	15,000	11	2.1	1.9	1.9	0.75	1.2	1.5	8.4
BKL-16-10	5/8	100	22,600	13.5	2.4	2.2	2.4	0.87	1.5	1.9	15.6
BKL-18/20-8	3/4	80	28,300	14.4	2.7	3.1	2.9	1.0	1.7	2.2	23.8

* Design Factor 4:1 Proof tested and certified. **Grade 100 hooks have recessed trigger

CODE NO.	CHAIN SIZE IN	GRADE	WORKING LOAD LIMITS (LBS)	DIMENSION (INCHES)				WIEGT EACH (LBS)
				L	B	G	H	
BKG-7/8-8	9/32	80	3,500	4.7	1.4	0.67	0.91	1.7
BKG-7/8-8	5/16	80	4,500	4.7	1.4	0.67	0.91	1.7
BKG-10-10	3/8	100	8,800	5.6	1.7	0.83	1.2	3.3
BKG-13-10	1/2	100	15,000	7	2.1	1.2	1.5	6.2
BKG-16-10	5/8	100	22,600	8.5	2.4	1.5	1.9	11.2
BKG-19/20-8	3/4	80	28,300	9.5	2.7	1.7	2.2	17.2


* Design Factor 4:1 Proof tested and certified. **Grade 100 hooks have recessed trigger



SAFETY HOOK CLEVIS TYPE

CODE NO.	WORKING LOAD LIMITS (METRIC TONS)	DIMENSION (INCHES)								WIEGT EACH (LBS)
		B	C	G	H	K	L	S	A	
UKN-0.75**	0.75	0.79	2.2	0.51	0.79	0.75	3.2	0.20	0.12	0.55
UKN-1**	1.0	0.79	2.8	0.67	0.99	0.99	3.7	0.24	0.16	1.2
UKN-2**	2.0	1.0	3.4	0.79	1.2	1.2	4.5	0.32	0.20	2.2
UKN-3	3.0	1.1	4.1	0.91	1.2	1.4	5.2	0.39	0.24	2.9
UKN-4	4.0	1.1	4.4	1.1	1.5	1.7	5.5	0.43	0.28	4.2
UKN-5	5.0	1.3	5.1	1.2	1.8	1.8	6.5	0.47	0.32	6.2
UKN-8	8.0	1.3	5.2	1.5	2.0	2.0	6.8	0.51	0.35	8.2
UKN-10	10.0	1.9	6.6	1.7	2.3	2.2	8.7	0.55	0.35	13.9
UKN-15	15.0	2.1	7.4	2.0	2.6	2.2	9.4	0.51	0.47	19.8

* Design Factor 4:1 Proof tested and certified. **Grade 100 hooks have recessed trigger

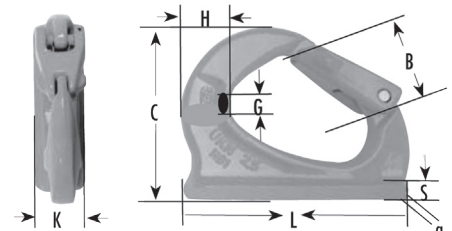

ALLOY WELD-ON HOOKS