





THE MAX SERIES

Model AC 36 shown

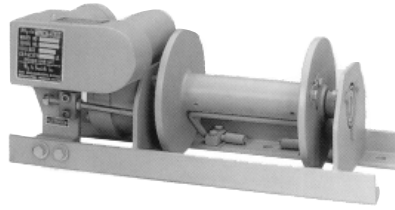


HYDRAULIC MODEL

Model HY1 shown




THE I-BEAM SERIES

Model 800 shown

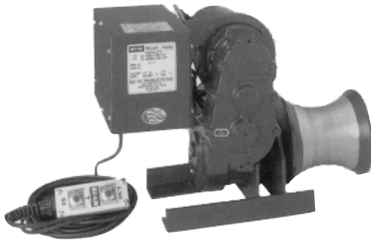

THE UTILITY SERIES

Model 30-12 shown

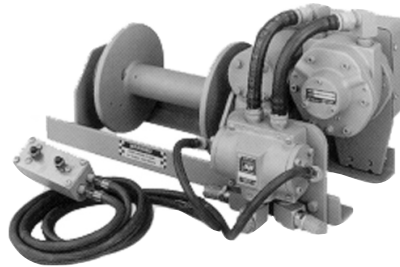

PNEUMATIC MODEL

Model Air 1000 shown



THE VERSATILE SERIES

Model 520 shown

NOTE: Pole Mount Kits Available.

MODEL SPECIFICATIONS

REQUIREMENT	STANDARD				MAX		UTILITY			I-BEAM	VERSATILE			
	HYDRAULIC HY1	PNEUMATIC AIR 1000	ELECTRIC		ELECTRIC		ELECTRIC		HYDRAULIC HY3	ELECTRIC 800*	500	510	520	520***
Lift Capacity (lbs.) (double line) first layer***	3000	2500	2000	2500	6000	6000	1600	1600	1600	2000	2000	2000	3000	3000
Motor Voltage	Hydraulic	N/A**	115V or 230V AC	12V DC	115V or 230V AC	12V DC	115V or 230V AC	12V DC	Hydraulic	115V or 230V AC	115V or 230V	115V or 230V	115V or 230V	115V or 230V
No Load Drum Speed (FPM)	17	32	30	10	11	4	59	21	29	30	8 Constant speed	12 Constant speed	12 Constant speed	12 Constant speed
Full Capacity Single-Line Lift Speed	10 FPM @1500 lbs.	15 FPM @1250 lbs.	20 FPM @1000 lbs.	9 FPM @1250 lbs.	7.25 FPM @3000 lbs.	4 FPM @3000 lbs.	30 FPM @800 lbs.	15 FPM @800 lbs.	29 FPM @800 lbs.	20 FPM @1000 lbs.	8 FPM @1000 lbs.	12 FPM @1000 lbs.	12 FPM @1500 lbs.	12 FPM @1500 lbs.
Full Load (amps)			19	100	19	100	19	100		19	9	17	17	5
Duty Cycle	50%	50%	25%	25%	25%	25%	25%	25%	25%	25%	50%	50%	50%	50%
1/4" Cable Capacity (ft.)	250	250	250	250	250**	250**	n/A	N/A	N/A	250*	250	250	250	250
Dimensions (W"xH"xL")	9x9x21	12x11x22	12x14x22	12x14x23	13x13x27	13x13x28	12x14x18	12x14x18	8x8x16	15x14x25	13x11x32	13x11x32	13x11x32	13x10x38
Shipping Weight (lbs.)	60	77	67	69	128	138	54	65	60	143	98	115	115	165

*I-Beam size must be specified at time of order. **See separate sheet for air consumption. ***See catalog for multiple layer ratings.

*Shipped with 40 foot 1/4" cable. **110 foot capacity 3/8" cable; 3/8" cable recommended on this model. ***Three phase.