
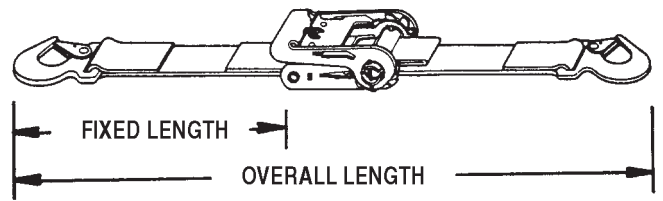


## HAND RATCHET TYPE TIE DOWN STRAPS

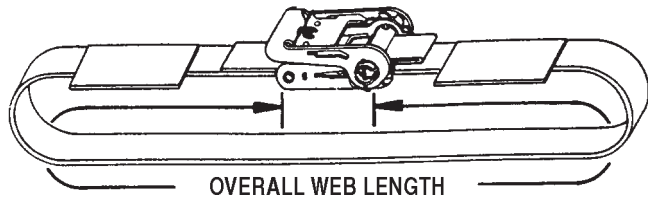

### 2" LONG WIDE HANDLE 804 WITH 2004 WEBBING

10,000 lb. Breaking Strength.

CODE NO.	STRAP LENGTH	END HARDWARE	WORKING LOAD LIMIT
512720	27 ft.	1015 Flat Hook	3,335 lbs.
513020	30 ft.	1015 Flat Hook	3,335 lbs.
512739	27 ft.	3705 Chain Anchor	3,335 lbs.
513039	30 ft.	3705 Chain Anchor	3,335 lbs.
512784	27 ft.	1006 Wire Hook	3,335 lbs.
513084	30 ft.	1006 Wire Hook	3,335 lbs.



### 3" LONG WIDE HANDLE 806 WITH 3004 WEBBING

15,000 lb. Breaking Strength.

CODE NO.	STRAP LENGTH	END HARDWARE	WORKING LOAD LIMIT
552721	27 ft.	1020 Flat Hook	5,000 lbs.
553021	30 ft.	1021 Flat Hook	5,000 lbs.
552740	27 ft.	3705 Chain Anchor	5,400 lbs.
553040	30 ft.	3705 Chain Anchor	5,400 lbs.
552750	27 ft.	3704 Grab Hook	5,400 lbs.
553050	30 ft.	3704 Grab Hook	5,400 lbs.



### 4" LONG WIDE HANDLE 808 WITH 4004 WEBBING

15,000 lb. Breaking Strength.

CODE NO.	STRAP LENGTH	END HARDWARE	WORKING LOAD LIMIT
592710	27 ft.	1026 "V" Ring	5,000 lbs.
593010	30 ft.	1026 "V" Ring	5,000 lbs.
592721	27 ft.	1021 Flat Hook	5,000 lbs.
593021	30 ft.	1021 Flat Hook	5,000 lbs.
592736	27 ft.	1016 Wire Hook	6,500 lbs.
593036	30 ft.	1016 Wire Hook	6,500 lbs.



Webbing straps must be protected when used on rough or sharp objects. Straps that are cut, worn or damaged shall not be used and shall be replaced immediately. All strap assemblies shall be inspected prior to each use. The use of "cheater bars" or other means of increasing leverage on a ratchet bucket handle or winch, other than a Kinedyne approved device, can cause serious injury to the user and/or bystanders.

