


# OPEN WEDGE SOCKETS 3/8 TO 1-1/2 INCH WIRE ROPE SIZES

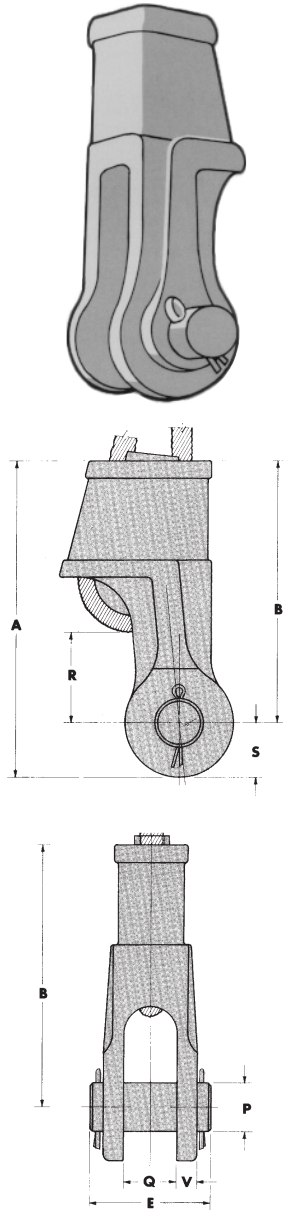

## OPEN WEDGE SOCKET

CODE NO.	WIRE ROPE SIZE	WT.	OVERALL LENGTH A	NET LENGTH B	TOTAL THICKNESS E	PIN DIA. P	WIDTH BETWEEN EARS Q	PIN TO OBSTR. R	PIN TO END OF FITTING S	THICKNESS OF EAR V
WS-4380	3/8	3	6.500	5.375	2.625	1	1	1.750	1.125	.375
WS-4716	7/16	3	6.500	5.375	2.625	1	1	1.937	1.125	.375
WS-4120	1/2	3	6.500	5.375	2.625	1	1	1.937	1.125	.375
WS-5120	1/2	8.5	8.750	7.250	3.500	1.250	1.375	2.437	1.500	.625
WS-5916	9/16	8.5	8.750	7.250	3.500	1.250	1.375	2.812	1.500	.625
WS-5580	5/8	8.5	8.750	7.250	3.500	1.250	1.375	2.750	1.500	.625
WS-6580	5/8	9	8.812	7.312	3.500	1.250	1.500	2.500	1.500	.562
WS-8A580	5/8	17	11.250	9.125	4.125	1.625	1.750	3.187	2.125	1
WS-6340	3/4	9	8.812	7.312	3.500	1.250	1.500	1.780	1.500	.562
WS-8A340	3/4	17	11.250	9.125	4.125	1.625	1.750	2.844	2.125	1
WS-7780	7/8	15	11	9.500	3.500	1.250	1.312	2.937	1.500	.625
WS-8780	7/8	16	11.375	9.500	4.125	1.625	1.750	2.875	1.875	.750
WS-7100	1	14.5	11	9.500	3.500	1.250	1.315	2.875	1.500	.725
WS-8100	1	16	11.375	9.500	4.125	1.625	1.750	2.500	1.875	.750
WS-10118	1-1/8	45	15.437	13.250	4.125	1.625	1.750	3.062	2.187	.750
WS-11118	1-1/8	55	16	13.500	5.500	2.500	2.500	4.500	2.500	.812
WS-10114	1-1/4	45	15.437	13.250	4.125	1.625	1.750	3.125	2.187	.750
WS-11114	1-1/4	55	16	13.500	5.500	2.500	2.500	4.250	2.500	.812
FS-26112	1-1/2	99	18.375	15	6.875	3	2.625	4.187	3.375	1.250

### KEY TO OPEN WEDGE SOCKET MODEL NUMBERS

**WS** | **6** | **3/4"**  
 Wedge Socket | Body Number | Wire Rope Wedge Size

### TO ORDER PLEASE SPECIFY:


Model Number  
 Exact Rope Size  
 NOTE: This product may be ordered complete or any component part.  
 See order key below.

### EXAMPLES:

"WS-8-7/8 INCH OPEN WEDGE SOCKET COMPLETE"  
 "WS-6-3/4 OPEN WEDGE SOCKET LESS PIN AND COTTERS"  
 "7/8-INCH WEDGE ONLY FOR WS-7 SOCKET BODY"



**SEE SAFETY INFORMATION PAGE 100**

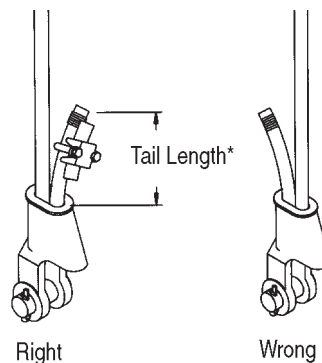

\*Tail Length  
 Standard 6 to 8 strand wire rope. A minimum of 6 rope diameters, but not less than 6". (i.e. - For 1" rope: Tail Length = 1" x 6 = 6")

Rotation Resistant Wire Rope  
 A minimum of 20 rope diameters, but not less than 6". (i.e. - For 1" rope: Tail Length = 1" x 20 = 20")

